



Leak Detector

Fugalarm

Fugalarm




LEAK DETECTOR
SYSTEM FOR
DOUBLE WALL
TANKS ACCORDING
TO EN13160

Leak Detector. Model Fugalarm



Exterior View Front Face

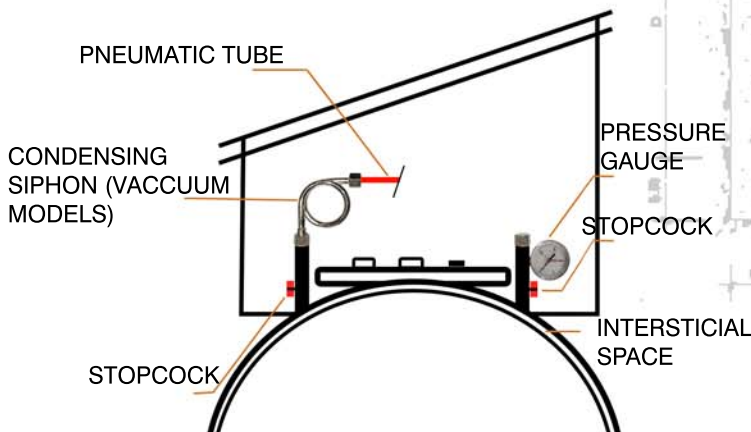

FUGALARM is a preventive leak detector system for double wall tanks.

By anticipating the possibility of wall perforations before there is a breakdown, it allows to minimize risks of medio-ambiental leakage.

The two models manufactured allow to use it with pressure or vacuum tanks in the interstitial space.

It can be used for all the tanks of the market because it gets presets and modifiable thresholds.

In possible choice it can include a maintenance device to regenerate the pressure or the vacuum when the installation user needs it.

System Characteristics

- Manufactured according to EN13160 and with authentication CE.
- Acoustics and visuals indicators for the system state.
- Display with indicators in absolute value of the pressure or the vacuum level of the interstitial space.
- Fugalarm-V Vacuum model. Vacuum working range -1 bar.
- Fugalarm-P pressure model. Pressure working range 1 bar.
- Testing and stopping alarm keys like for reaching options menu.
- Switch relay for remote indication of the alarm signals.
- Zener barrier built-in.
- Dimensions: 110 x 215 x 40